



FISCHER & PORTER REBUILD (FPR-E) RECORDING RAIN GAUGE

OBSERVER INSTRUCTIONS

DRAFT

APRIL 13, 2011

U.S. Department of Commerce
National Oceanic and Atmospheric Administration
National Weather Service - Cooperative Weather Observer Program
Office of Climate, Water, and Weather Services
Observing Services Division - W/OS7



Table of Contents

<u>Se</u>	tion:	<u>age</u>			
1	ntroduction	3 3			
2.	Routine Checks	5 5 5			
3.	Monthly Data Retrieval. 3.1 Insert Flash Drive. 3.2 Turn on the Display. 3.3 Display Response. 3.4 Verify the End of Download. 3.5 Remove the Flash Drive. 3.6 Enclose for Mailing. 3.7 Re-cap the USB Port.	6 6 6 6			
4.	Mail the Flash Drive	7			
5.	Journal Responsibility	7 7			
<u>Ap</u>	endix:				
A.	Mailing Address for Flash Drive	. 10			
В.	. Required Journal Entries11				
C.	F&P Log Sheet Example	. 11			

1. Introduction

1.1. <u>Fischer & Porter Rain Gauge</u>: The new electronic precipitation recorder fits right in place where the mechanical weighing assembly and paper puncher were mounted in the Fischer & Porter (F&P) housing. When you open the access door (Fig 1.1) you will see a clear plastic box (Fig 1.2) which contains the data recorder. This is known as the Zeno Assembly and it must remain closed in its protective, clear plastic shell. Behind the recorder you may see the weighing sensor, an S-shaped metallic bar that measures the weight of the bucket and its liquid contents (Fig 1.3).



Fig 1.1 FPR-E Recording Rain Gauge

1.2. Weighing Sensor: The weight of the catch bucket with liquid pulls on an S-shaped metallic bar that stretches with increased weight. This weighing sensor is very sensitive and can detect changes of one thousandth of an inch of precipitation in a matter of several seconds. Readings from the sensor are processed by the recorder every fifteen minutes and stored. The stored data is transferred to the USB memory stick when you insert it into the socket on the right side of the Zeno Assembly.



Fig 1.2 Zeno Assembly



Fig 1.3 Weighing Sensor

1.3. Rain Gauge Display: The display stays in a sleep mode until you wake it up by pressing the Display button on the Zeno's right side (Fig 1.4).

This display tells you the accumulated rain amount of everything in the bucket, i.e., ion plus any additives like food grade propylene glycol (FGPG) or oil. The units are hundredths of an inch of rainfall.



Fig 1.4 Rain Gauge Display

The amber display will stay lit for about two-minutes before automatically turning off.

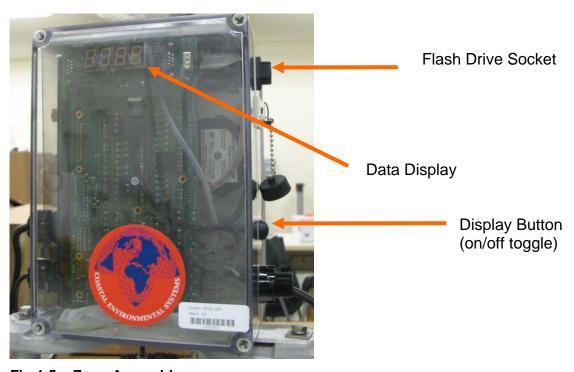


Fig 1.5 Zeno Assembly

To collect data, your NWS Representative (NWSREP) mails you a Government issued USB Flash Drive, each month. In the first few days of the month unscrew the protective cap and insert the Flash Drive into the recorder. It will collect the data. You will mail the flash drive back to the WFO along with your log sheet.



Fig 1.6 USB Flash Drive

Expect the recorder to take about five minutes to download the last 100 days of data to the flash drive. Stand by the Zeno Assembly while it conducts the download for any messages that may appear.

2. Routine Checks

Each month, when you open the F&P door press the Display Button on right side of Zeno Assembly, to light-up the display of the current bucket level.



Fig 2.1 Rain Gauge Display

2.1. <u>Amount in Gauge</u>: The display gives the current rain equivalent, in inches, or anything in the bucket. This includes rain water, melted snow, oil (to prevent evaporation), food grade propylene glycol (to prevent freezing solid), and possibly anything that fell or crawled into the bucket since it was last serviced.

In Fig 2.1, the Rain display shows 15.01 inches of liquid in bucket.

Phone your NWSREP if the display ever reads a negative value or reports more than 15.00 inches (bucket capacity is 20 inches). This way your NWSREP will know to arrange a visit to service the gauge. Some Observers have an agreement with their NWSREP to drain the bucket; or add oil; or add food-grade propylene glycol. If you have this responsibility then follow Section 5, Journal Responsibilities, to write down your maintenance actions into the F&P Observer Log Sheet (Appendix C).

- 2.2 <u>Spare Flash Drive</u>: You should keep a spare Flash Drive inside your house in a ziplock bag labeled as Spare Flash Drive. Do not leave your spare Flash Drive outdoors as some may not work at cold temperatures.
- 2.3. Review the F&P Log Sheet: Certain observers are given the responsibility to drain and recharge the collection bucket. These observers are required to review and update the F&P Log Sheet for any performed maintenance or discrepancies that occurred since the last monthly mailing. Otherwise, all observers should use the F&P Log Sheet to write down any anomalies and then phone the NWSREP.
- 2.4. <u>Clean Solar Panel</u>: Make sure the surface of the solar panel is free of dust or mildew or snow. Trim any tall grass, bushes, or tree branches that would cast a shadow on the solar panel.

3. Monthly Data Retrieval

In the first five days of each month, <u>but never before 12am</u> on the first day of month, at a time when it is not raining or snowing, walk out to the Fischer & Porter gauge, and retrieve the precipitation measurements. This outdoor procedure might take 5 minutes.

- 3.1 <u>Un-cap the USB Port:</u> First unscrew the cap that covers the Flash Drive socket (Fig 3.1).
- 3.2 <u>Turn on the Display:</u> Turn on the display by pressing the button several inches below the Flash Drive socket (Fig.
- 1.5). The Flash Drive will not work unless display is on.




Fig 3.1 Flash Drive Port

- 3.3 <u>Insert Flash Drive:</u> Then insert the Flash Drive into the socket on the right side of the Zeno Assembly (Fig 3.1).
- 3.4 <u>Display Activates:</u> The display responds with the amount of time the Zeno will be active copying the last 100-days of data onto the Flash Drive. This 'time to complete,' is measured in minutes and seconds (Fig 3.2 shows 3 minutes and 23 seconds to finish).



Fig 3.2 Time left to finish download

The display counts down until the download is finished. This process might take 5-minutes to complete.

3.5 <u>Verify the End of Download</u>: When the download is finished the code, **UFdC** will display.



Fig 3.3 Monthly data saved and done

- 3.6 <u>Remove Flash Drive</u>: Pull the Flash Drive gently from its socket. Recap the Flash Drive.
- 3.7 Re-cap the USB Port: Place the circular cap which is kept on its chain, onto the USB socket, and screw it closed to a finger-tight level.

Then, place the Flash Drive into the designated durable padded envelope supplied to you by your NWSREP. Ensure the Flash Drive is either capped or in a closed position.

<u>Note</u>: The Flash Drive was purchased by the National Weather Service and is considered Government property – therefore please do not use it other than to download data from the Fischer-Porter rain gauge.

4. Mail the Flash Drive

Mail the Flash Drive by the 7th day of month to your NWSREP. See Appendix A for the mailing address of your Weather Forecast Office (WFO).

Note: Use the same type of envelope you used to mail the Punch Tape records to your WFO. The Jiffy No. 0 (zero) padded mailing envelope (see Fig 4.1) is sufficient to hold the F&P Log Sheet if you need to mail one. The photo shows the standard ten inch square, darker color envelope. Newer, bubble-pack square envelopes have thinner paper and tear more easily and can result in the Flash Drive being lost in the mail.

Certain United States Postal Service (USPS) centers might use electro-magnetic scanning devices to screen materials coming through the mail. To avoid potential damage to the Flash Drive, you may write: 'Sensitive Magnetic Media, Handle Manually' on the front of the Jiffy No. 0 mailing envelope.



Fig 4.1 Jiffy No. 0 Envelope

5. Journal Responsibility

5.1 <u>Continuous Automated Logging</u>: Previously, any time you suspended the F&P gauge from its 15-minute timer or each month when you removed the Punch Tape from the sprockets, you were required to write down the 'OFF Date/Time', as well as your Station ID (i.e., 23-4652), your Station Name (i.e., Lake City), and your State (i.e., MO) in felt tip marker to your Punch Tape. You then had to draw a straight line (i.e., a "time line") across the width of the Punch Tape, to stand as an unmistakable reference to show where the interruption began. When you rethreaded the paper you would mark 'ON Date/Time.'

With the FPR however, the recorder continues to run un-interrupted while you perform the critical monthly task of downloading precipitation data to the Flash Drive. So, you do <u>not</u> need to document the date or time (i.e., OFF date/time) when you download the monthly data.

5.2 <u>Bucket Maintenance – Journal Entries</u>: When routine maintenance activity changes the weight of the collection bucket – the precipitation record for the climate program is at risk of data corruption. To avoid damaging the climate data record, changes in the bucket level have to be accounted for with a written entry in the F&P Log Sheet. Each time the NWSREP adds food grade propylene glycol (FGPG) for winter season – this must be accounted, and when the NWSREP adds one quart of oil to the bucket to prevent evaporation he/she write an entry to the F&P Log Sheet. Appendix C, gives an example with instructions on how to journal these important interruptions in the data record. This is analogous to the "OFF Date/Time" you entered on the F&P Punch Tape.

The Log Sheet is formatted so you can mark with a pen multiple boxes for a given maintenance job, and simply report the Start Time, Stop Time, the corresponding Bucket Level (i.e., display reading), at start and finish of the maintenance.

5.3 <u>Delegated Responsibilities</u>: If your NWSREP has agreed to transfer some routine maintenance activities to you as the Observer, then you will have a new Observer responsibility to write journal entries into the F&P Log Sheet. For example if you drain, empty, or in any way alter the fluid levels in the bucket with addition of Food Grade Propylene Glycol (FGPG), or oil to retard evaporation, the Observer shall follow the instructions for completing the F&P Log Sheet. Then each month, enclose a hard copy of the F&P Log Sheet, into the same mailer-envelope as the Flash-Drive, and mail to the attention of your NWSREP.

<u>Before you Begin Maintenance Activity</u>: Obtain the F&P Log Sheet, and on the next available row, write down the current Date (MM/DD/YYYY), and the Start Time (HH:MM, for local 'standard' hours, i.e., do <u>not</u> use Daylight Time values). Then write down the 'Amount' that appears in the display – this is the bucket level that is about to change.

<u>Maintenance Activities to be Noted</u> Move your pen to Column 3, 'Routine Actions,' and mark off one or more of the Check Boxes that describe this maintenance action.

Types of Maintenance Activities:

- ❖ Partial Draining of Bucket: Drain the bucket into a five-gallon sealable container. When finished, return the drain tube to its operational position, and in the same row of the Log Sheet write down the Stop Time, and the Amount that now appears in the display. Make sure you marked the box, "Partial Drain" in the 'Routine Actions' column. See example in Appendix C.
- ❖ Emptying of Bucket: Empty the bucket into a five-gallon sealable container. When finished, return the drain tube to its operational position, and in the same row of the Log Sheet write down the Stop Time, and the Amount that now appears in the display. Make sure you marked the box "Partial Drain" in the 'Routine Actions' column.
- ❖ Added FGPG (Winter): Add one or more whole Quarts of Food Grade Propylene Glycol (FGPG) to prevent seasonal freezing of the bucket fluids. Make sure you marked the box 'Add FGPG' in the 'Routine Actions' column.
- ❖ Added Oil: Add one quart of Oil to the bucket to retard evaporation of the collected precipitation liquids. Make sure you marked the box, 'Add Oil' in the Routine Actions, column.
- ❖ Removed/Installed Funnel: Remove the funnel at start of winter season, and install the funnel at start of summer season. Make sure you marked the box, 'Funnel In' when you are installing the funnel. Make sure you mark the box, 'Funnel Out' when you are removing the funnel in the Routine Actions column.

Removed Object from Bucket: Twice yearly inspection of the contents of the bucket is advised. If you find an object, such as a pinecone, bird, or small animal, proceed to empty, rinse, and towel dry the bucket. Then describe the object that was removed, with a written entry to the 'Special Notes' section (Log Sheet, Column 5).

F&P LOG SHEET COOP Number: 01-5678 Your Name: Walter Roberts, Pinetree St Park NWSREP Name: Michael Jones (TAE) .				
Date MM/DD/YY	Time	Amount	Routine Actions	Special Notes (i.e., displayed error messages, etc.)
03/28/2011	Start: <u>10:15 am</u> Stop: <u>10:45 am</u>		☐ Add Oil ☐ Add FGPG☐ Empty Bucket ☒ Partial Drain	
<u>06/14/2011</u>	Start: <u>4:15 pm</u> Stop: <u>4:45 pm</u>	<u>8.72</u> <u>8.72</u>	□ Add Oil □ Add FGPG □ Empty Bucket □ Partial Drain Funnel - □ In □ Out	'Err 12' message displayed. Phoned NWSREP.
09/28/2011	Start: <u>2:30 am</u> Stop: <u>2:45 am</u>	10.39 10.39	☐ Add Oil ☐ Add FGPG☐ Empty Bucket ☐ Partial Drain	Wiped down the F&P shell to remove dust.

Fig 5.1 This Log Sheet is required if Observer is authorized to add Propylene Glycol, Oil, Drain the Bucket, or change the funnel.

APPENDIX A - MAILING ADDRESS FOR FLASH DRIVE TO WFO

1. Where is my local WF	0?		
,		WFO Name	
		Street Address	
		Town, State, Zip Code	
		Phone Number	
2. Who is my NWSREP?			
		First and Last Name	
		Phone Number	
		E-mail at WFO	
3. Does my NWSREP ha	ve an alternate?		
		First, Last Name	
		Phone Number	•
		E-mail at WFO	

Note: Please journal all routine maintenance actions you have been asked to conduct within two weeks of the action, and mail the Log Sheet to your NWSREP in the same envelope as the Flash Drive. Always phone or e-mail your NWSREP if you encounter a discrepancy (i.e., false looking Amount reading, power outages, object in bucket) or when the bucket has reached 15 inches and draining is required. Your NWSREP will keep a copy of your Log Sheet at his WFO.

APPENDIX B: REQUIRED JOURNAL ENTRIES

If your NWSREP has delegated certain maintenance activities for you, the Observer, then you are required to write down these activities in the Log Sheet provided you in Appendix C.

Report these actions on your FPR-E Log Sheet:

Added Oil to Bucket

Added Food Grade Propylene Glycol (FGPG) to Bucket

Partially Drained Bucket - Some liquid (i.e., oil) left in bucket

Emptied Bucket - Bucket completely emptied

Installed Funnel – for summer

Removed Funnel – for winter

Routine Gauge Check

Foreign Object Found in Bucket. Also phone your NWSREP.

Time is more than 15 minutes fast/slow

Non-routine download to Flash Drive

This table gives the minimum list of activities required to be reported on the F&P Log Sheet. On occasion, your NWSREP may request a routine check of the rain gauge.

Instructions for how to journal these activities are provided in Appendix C, on how to complete the F&P Log Sheet.

The F&P Log Sheet shall be completed and mailed to the NWSREP once per month with your Flash Drive, in the same mailing envelope.

The F&P Log Sheet becomes a vital way for the NWSREP to anticipate supplies and maintenance needs for times he/she conducts the semi-annual station visitation.

The F&P Log Sheet may be used by the NWSREP to supplement the record s/he produces upon station visitation.

APPENDIX C F&P LOG SHEET EXAMPLE AND INSTRUCTIONS

COOP Number: 01-5678 Your Name: Walter Roberts, Pinetree St Park NWSREP Name: Michael Jones (TAE) .

Date MM/DD/YYYY	Time hh:mm am/pm	Amount NN.cc	Routine Actions	Special Notes (i.e., displayed error messages, etc.)
03/28/2011	Start: <u>10:15 am</u> Stop: <u>10:45 am</u>		☐ Add Oil ☐ Add FGPG☐ Empty Bucket ☐ Partial Drain Funnel - ☐ In ☐ Out	
06/14/2011	Start: <u>4:15 pm</u> Stop: <u>4:45 pm</u>	<u>8.72</u> <u>8.72</u>	☐ Add Oil ☐ Add FGPG☐ Empty Bucket ☐ Partial Drain Funnel - ☐ In ☐ Out	'Err 12' message displayed. Phoned NWSREP.
09/28/2011	Start: <u>2:30 am</u> Stop: <u>2:45 am</u>	_10.39_ _10.39_	☐ Add Oil ☐ Add FGPG☐ Empty Bucket ☐ Partial Drain Funnel - ☐ In ☑Out	Wiped down the F&P shell to remove dust.
10/15/2011	Stop: <u>11:15 am</u> Stop: <u>12:15 pm</u>		□ Add FGPG □ Empty Bucket □ Partial Drain □ Funnel - □ In □ Out	Removed pinecone, cleaned bucket, and then added 1-qt of oil.
12/21/2011	Start: <u>9:30 am</u> Stop: <u>9:30 am</u>	_6.14_ _6.43	☐ Add Oil ☐ Add FGPG☐ Empty Bucket ☐ Partial Drain Funnel - ☐ In ☐ Out	Very cold month – had to add 2 quarts of FGPG to prevent ice damage.

Instructions: Before you start your action, enter the date and then at time of maintenance, enter current time (standard time, not daylight time) on the 'Start' line in Column 2. Then press the Display button to view the Amount in bucket. Write this value in Column 3 (Amount). Then mark appropriate box(es) in Column 4 (Routine Actions) to indicate your actions. If not a routine action, write your comments in Column 5 (Special Notes). When you have completed your action, go back to Column 2, and enter current time (standard time, only) into the 'Stop' line. Always phone your NWSREP if an error message displays or display fails to light-up on command. Always mail your Log Sheets to your NWSREP. Keep spare sheets inside shelter.

FISCHER & PORTER LOG SHEET

COOP Station Number:	Your Name:	NWSREP Name:

			T	
Date MM/DD/YYYY	Time hh:mm am/pm	Amount NN.cc	Routine Actions	Special Notes (i.e., displayed error messages, etc.)
	Start:	<u>.</u>	Add Oil Add FGPG	
	Stop:	<u>.</u>	☐ Empty Bucket ☐ Partial Drain Funnel - ☐In ☐Out	
	Start:		Add Oil Add FGPG	
	Stop:		☐ Empty Bucket ☐ Partial Drain Funnel - ☐ In ☐ Out	
	Start:		Add Oil Add FGPG	
	Stop:		☐ Empty Bucket ☐ Partial Drain Funnel - ☐In ☐Out	
	Start:		Add Oil Add FGPG	
	Stop:		☐ Empty Bucket ☐ Partial Drain Funnel - ☐ In ☐ Out	
	Start:		Add Oil Add FGPG	
	Stop:		☐ Empty Bucket ☐ Partial Drain Funnel - ☐ In ☐ Out	
	Start:		Add Oil Add FGPG	
	Stop:		☐ Empty Bucket ☐ Partial Drain Funnel - ☐In ☐Out	
	Start:		Add Oil Add FGPG	
	Stop:		☐ Empty Bucket ☐ Partial Drain Funnel - ☐ In ☐ Out	